


## Selection diagram

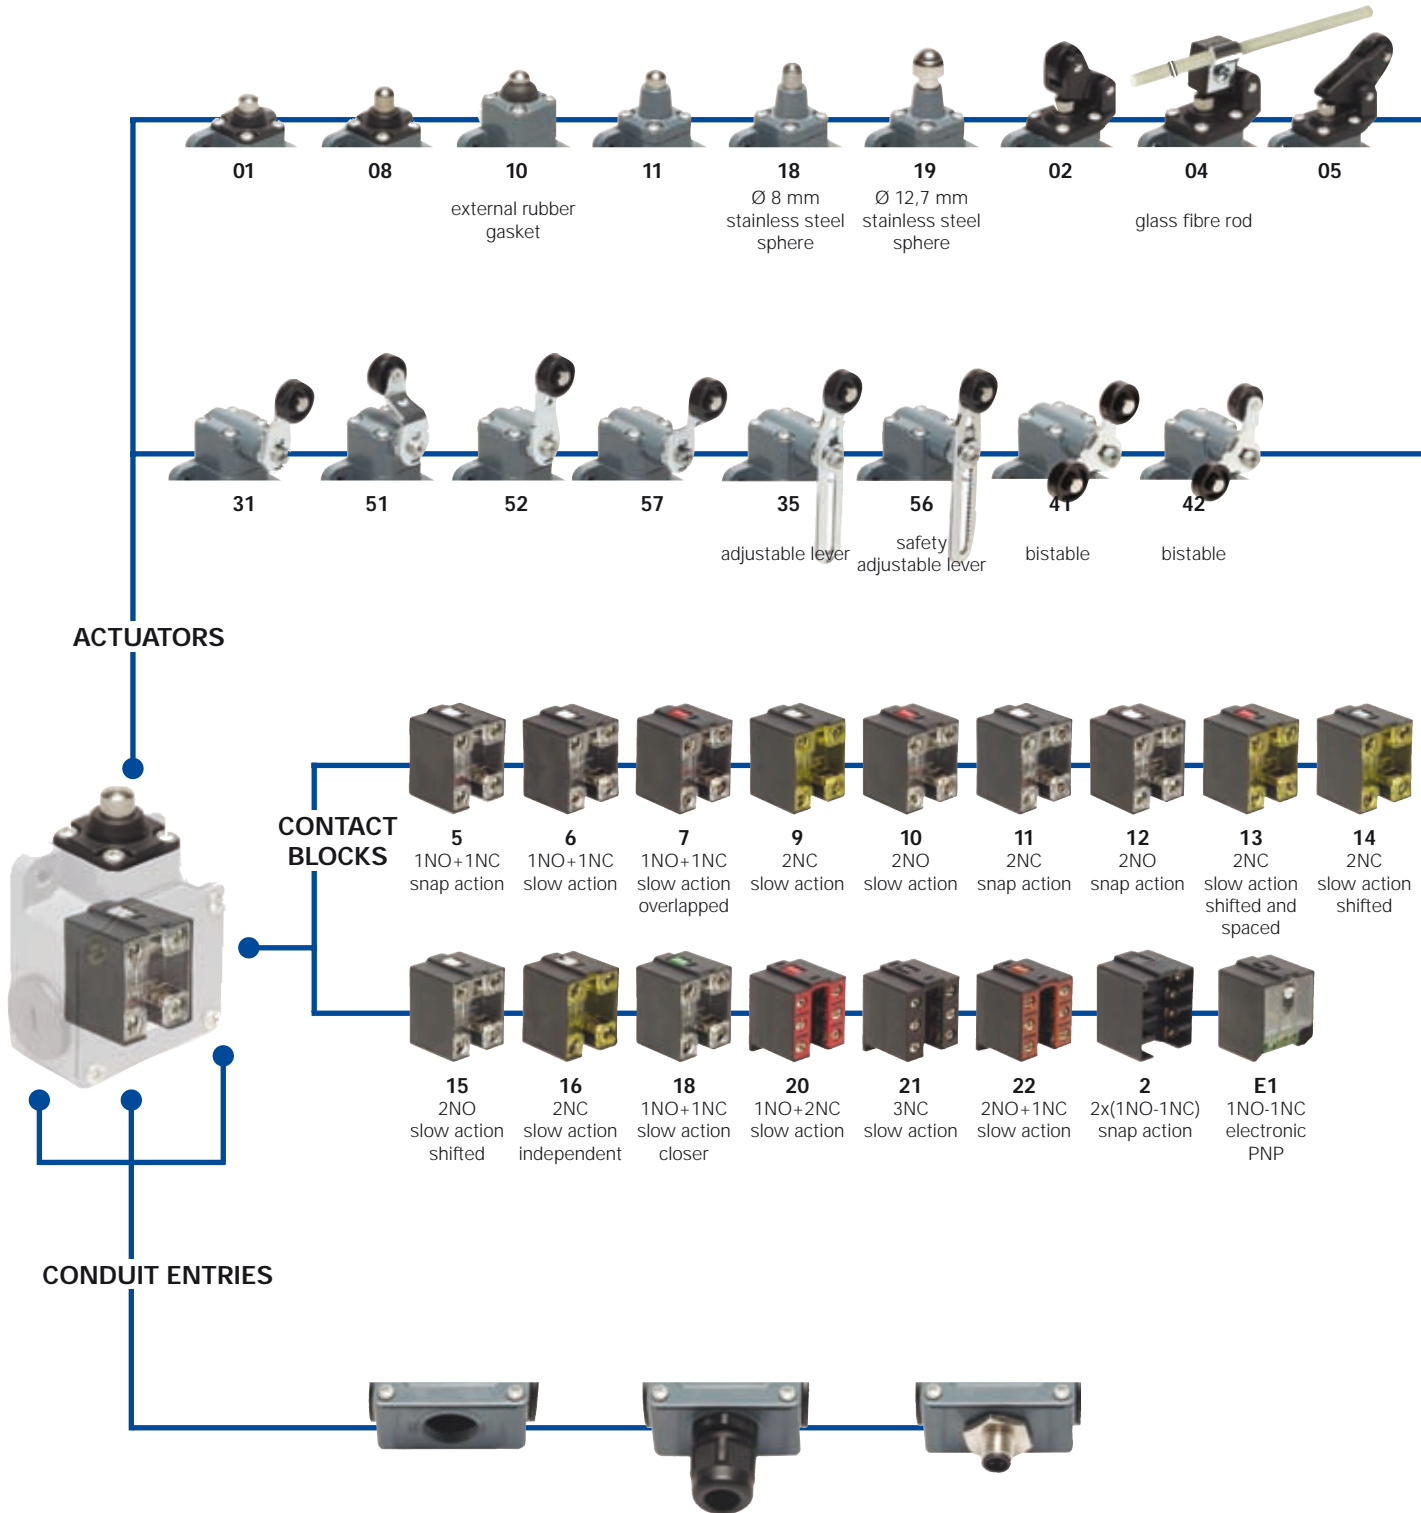


Threaded conduit entries	
	PG 13,5 (standard)
M2	M20x1,5

With assembled cable gland	
K21	for Ø 6 to Ø 12 mm cables range, from bottom
K121	for Ø 6 to Ø 12 mm cables range, from right
K221	for Ø 6 to Ø 12 mm cables range, from left
K25	for Ø 3 to Ø 7 mm cables range, from bottom
K125	for Ø 3 to Ø 7 mm cables range, from right
K225	for Ø 3 to Ø 7 mm cables range, from left

With M12 metal connector assembled and wired	
K40	8 poles from bottom
K41	8 poles from right
K42	8 poles from left
K50	5 poles from bottom
K51	5 poles from right
K52	5 poles from left

● product option  
→ accessory sold separately

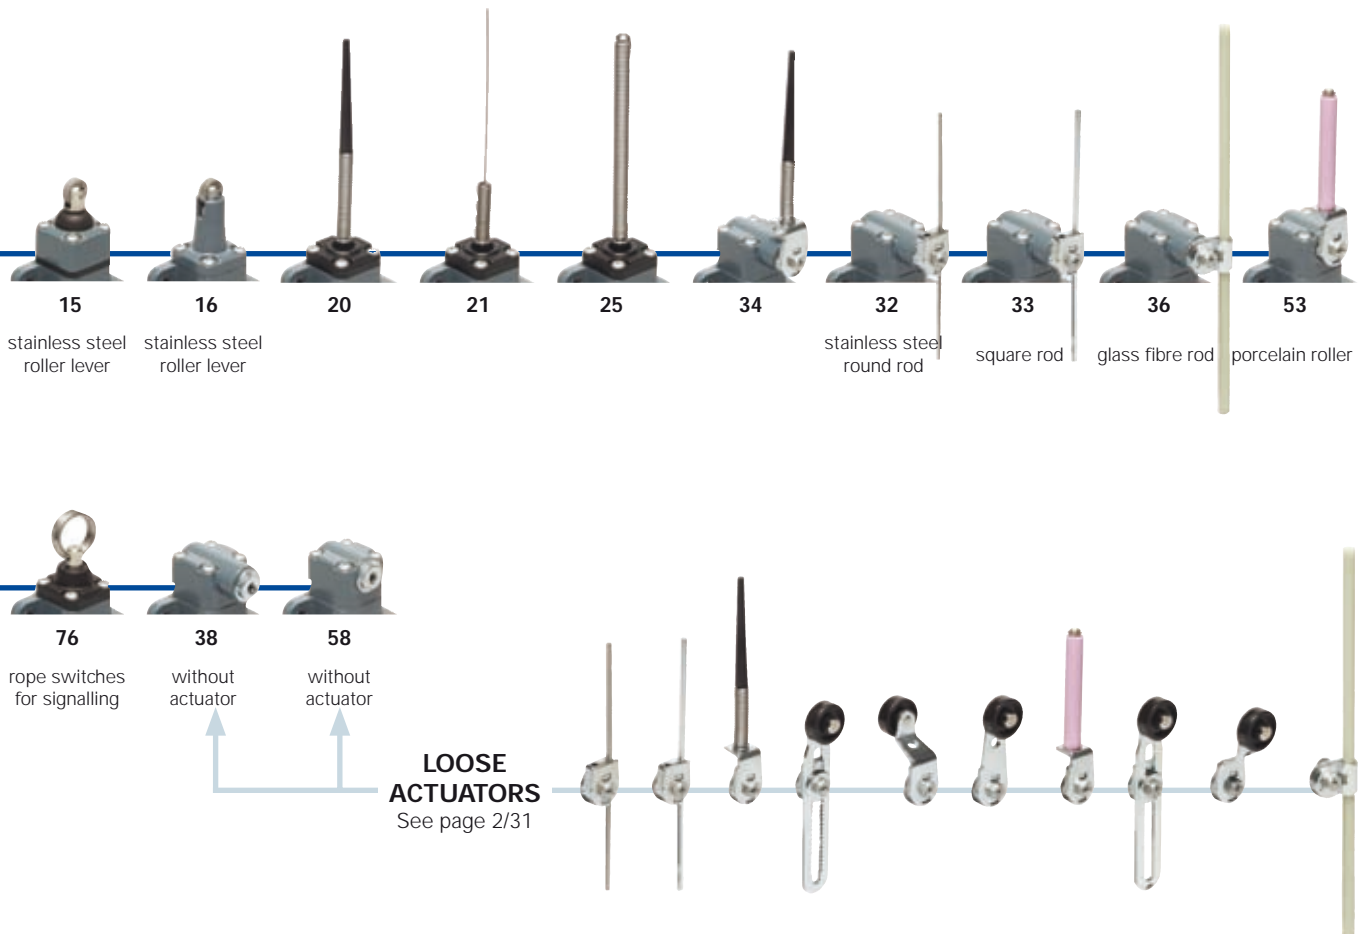

**Code structure**

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article		options	
<b>FL 502-1GM2K50</b>			
<b>Housing</b>	<b>FL</b> metal housing, three conduit entries	<b>Preinstalled cable gland or connectors</b>	no cable gland or connector (standard)
<b>Contact blocks</b>	<b>5</b> 1NO+1NC, snap action	<b>K21</b>	with bottom assembled cable gland suitable for Ø 6 to Ø 12 mm cables range
	<b>6</b> 1NO+1NC, slow action	<b>K40</b>	with M12 metal connector assembled and wired, 8 poles from bottom (only for contact blocks 2, 20, 21, 22)
	<b>7</b> 1NO+1NC, slow action overlapped	...	.....
	...	For the complete list of all combinations, please contact our technical office.	
<b>Actuators</b>	<b>01</b> short plunger	<b>Threaded conduit entries</b>	PG 13,5 (standard)
	<b>02</b> roller lever	<b>M2</b>	M20x1,5
	<b>05</b> offset roller lever	<b>Contacts type</b>	silver contacts (standard)
	...	<b>G</b>	silver contacts gold plated 1 µm (contact block 2 excluded)
<b>Suffix</b>	no suffix (standard)		
	<b>1</b> with Ø 20 mm stainless steel roller for actuators 02, 05, 31, 35, 51, 52, 56, 57, 41, 42		
	<b>2</b> with Ø 35 mm polymer roller (see special loose actuators on page 2/32)		
	<b>3</b> with Ø 50 mm rubber roller (see special loose actuators on page 2/32)		
	<b>4</b> with Ø 50 mm overhanging rubber roller (see special loose actuators on page 2/32)		



### Main data

- Metal housing, three conduit entries
- Protection degree IP67
- 17 contact blocks available
- 28 actuators available
- M12 assembled connector versions
- Silver contacts gold plated versions

### Markings and quality marks:



Approval IMO: EG605  
 Approval UL: E131787  
 Approval CCC: 2007010305230000  
 Approval ECU: 1010151

### Technical data

#### Housing

Metal housing, coated with baked epoxy powder  
 Three conduit entries  
 Protection degree: IP67

#### General data

Ambient temperature: from -25°C to +80°C  
 Version for operation in ambient temperature from -40°C to +80°C on request  
 Max operating frequency: 3600 operations cycles<sup>1</sup>/hour  
 Mechanical endurance: 20 million operations cycles<sup>1</sup>  
 Assembling position: any  
 (1) One operation cycle means two movements, one to close and one to open contacts, as foreseen by IEC 947-5-1 standard.

#### Cross section of the conductors (flexible copper wire)

Contact blocks 20, 21, 22, 33, 34:	min.	1 x 0,34 mm <sup>2</sup>	(1 x AWG 22)
	max.	2 x 1,5 mm <sup>2</sup>	(2 x AWG 16)
Contact blocks 5, 6, 7, 9, 10, 11, 12, 13, 14, 15, 16, 18:	min.	1 x 0,5 mm <sup>2</sup>	(1 x AWG 20)
	max.	2 x 2,5 mm <sup>2</sup>	(2 x AWG 14)
Contact block 2:	min.	1 x 0,5 mm <sup>2</sup>	(1 x AWG 20)
	max.	2 x 1,5 mm <sup>2</sup>	(2 x AWG 16)

#### In conformity with standards:

IEC 60947-5-1, EN 60947-5-1, IEC 60204-1, EN 60204-1, EN 1088, EN ISO 12100-1, EN ISO 12100-2, IEC 529, EN 60529, NFC 63-140, VDE 0660-200, VDE 0113, CENELEC EN 50013.

#### Approvals:

IEC 60947-5-1, UL 508, GB14048.5-2001

#### In conformity with requirements requested by:

Low Voltage Directive 2006/95/EC, Machinery Directive 2006/42/EC and Electromagnetic Compatibility 2004/108/EC.

#### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1, VDE 0660-206.

### Installation for safety applications:

Use only switches marked with the symbol ⊕. The safety circuit must always be connected with the **NC contacts** (normally closed contacts: 11-12, 21-22 or 31-32) as stated in the **standard EN 60947-5-1, encl. K, par. 2**. The switch must be actuated with **at least up to the positive opening travel** shown in the travels diagrams on page 6/4. The switch must be actuated **at least with the positive opening force**, shown in brackets, underneath each article, near the value of the min. force.

⚠ If not expressly indicated in this chapter, for the right installation and the correct utilization of all articles see requirements indicated from page 6/1 to page 6/8.

Electrical data		Utilization categories				
without connector	Thermal current (I <sub>th</sub> ):	10 A	Alternate current: AC15 (50...60 Hz)			
	Rated insulation voltage (U <sub>i</sub> ):	500 VAC 600 VDC	U <sub>e</sub> (V)	250	400	500
		400 VAC for contact blocks 20, 21, 22, 33, 34	I <sub>e</sub> (A)	6	4	1
	Protection against short circuits:	fuse 10 A 500 V type aM	Direct current: DC13			
	Pollution degree:	3	U <sub>e</sub> (V)	24	125	250
			I <sub>e</sub> (A)	6	1,1	0,4
with 5 poles M12 connector	Thermal current (I <sub>th</sub> ):	4 A	Alternate current: AC15 (50...60 Hz)			
	Rated insulation voltage (U <sub>i</sub> ):	250 VAC 300 VDC	U <sub>e</sub> (V)	24	120	250
	Protection against short circuits:	fuse 4 A 500 V type gG	I <sub>e</sub> (A)	4	4	4
	Pollution degree:	3	Direct current: DC13			
			U <sub>e</sub> (V)	24	125	250
			I <sub>e</sub> (A)	4	1,1	0,4
with 8 poles M12 connector	Thermal current (I <sub>th</sub> ):	2 A	Alternate current: AC15 (50...60 Hz)			
	Rated insulation voltage (U <sub>i</sub> ):	30 VAC 36 VDC	U <sub>e</sub> (V)	24		
	Protection against short circuits:	fuse 2 A 500 V type gG	I <sub>e</sub> (A)	2		
	Pollution degree:	3	Direct current: DC13			
			U <sub>e</sub> (V)	24		
			I <sub>e</sub> (A)	2		

**Data type approved by IMQ, CCC and EZU**

Rated insulation voltage (Ui): 500 VAC  
 400 VAC for contact blocks 20, 21, 22, 33, 34  
 Thermal current (Ith): 10 A  
 Protection against short circuits: fuse 10 A 500 V type aM  
 Protection degree: IP67  
 MV terminals (screw clamps)  
 Pollution degree 3  
 Utilization category: AC15  
 Operation voltage (Ue): 400 VAC (50 Hz)  
 Operation current (Ie): 3 A  
 Forms of the contact element: Za, Zb, Za+Za, Y+Y, X+X, Y+Y+X, Y+Y+Y, Y+X+X  
 Positive opening of contacts on contact block 5, 6, 7, 9, 11, 12, 13, 14, 16, 18, 20, 21, 22, 33, 34  
 In conformity with standards: EN60947-1, EN 60947-5-1 and subsequent modifications and completions, fundamental requirements of the Low Voltage Directive 73/23 EEC and subsequent modifications and completions.

Please contact our technical service for the list of type approved products.


**Data type approved by UL**

Utilization categories Q300 (69 VA, 125-250 VDC)  
 A600 (720 VA, 120-600 VAC)  
 Data of the housing type 1, 4X (indoor use only), 12, 13  
 In conformity with standard: UL 508  
 For all contact blocks except 2 and 3 use 60 or 75 °C copper (Cu) conductor and wire size No. 12-14 AWG. Terminal tightening torque of 7,1 Lb-In.  
 For contact blocks 2 and 3 use 60 or 75 °C copper (Cu) conductor and wire size No. 14 AWG. Terminal tightening torque of 12 Lb-In.

Please contact our technical service for the list of type approved products.

**Adjustable levers**

In switches with revolving lever it is possible to adjust the lever with 10° steps for the whole 360° range. The positive movement transmission is always guaranteed thanks to the particular geometrical coupling between the lever and the revolving shaft as prescribed for safety applications by the German standard BG-GS-ET-15.



**Overturning levers**

It's possible to fasten the lever on switches on straight or reverse side, maintaining the positive coupling. In this way it is possible to obtain two different work plans of the lever.



**Rotating heads**


In all switches, it is possible to rotate the head in 90° steps.




**Working operation of contact block 16 with independent contacts**

The contact block 16 has two NC contacts, both with positive opening activated independently according to the lever turning direction.


Lever turned to left



Lever not turned







Lever turned to right



**Unidirectional heads**

In the switches with revolving lever, it is possible to select the directional operation by removing the four screws of the head and revolving the internal piston (contact block 16 excluded).



Contacts type:

- R** = snap action
- L** = slow action
- LO** = slow action overlapped
- LS** = slow action shifted
- LV** = slow action shifted and spaced
- LI** = slow action independent
- LA** = slow action closer
- ⏏** = electronic PNP

Contact blocks

	With stainless steel roller on request	With stainless steel roller on request	With stainless steel roller on request	With stainless steel roller on request
5	<b>FL 501</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 502</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 504</b> 1NO+1NC	<b>FL 505</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC
6	<b>FL 601</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 602</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 604</b> 1NO+1NC	<b>FL 605</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC
7	<b>FL 701</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 702</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 704</b> 1NO+1NC	<b>FL 705</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC
9	<b>FL 901</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 902</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 904</b> 2NC	<b>FL 905</b> <span style="background-color: #d9ead3;">⊕</span> 2NC
10	<b>FL 1001</b> 2NO	<b>FL 1002</b> 2NO	<b>FL 1004</b> 2NO	<b>FL 1005</b> 2NO
11	<b>FL 1101</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1102</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1104</b> 2NC	<b>FL 1105</b> <span style="background-color: #d9ead3;">⊕</span> 2NC
12	<b>FL 1201</b> 2NO	<b>FL 1202</b> 2NO	<b>FL 1204</b> 2NO	<b>FL 1205</b> 2NO
13	<b>FL 1301</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1302</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1304</b> 2NC	<b>FL 1305</b> <span style="background-color: #d9ead3;">⊕</span> 2NC
14	<b>FL 1401</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1402</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1404</b> 2NC	<b>FL 1405</b> <span style="background-color: #d9ead3;">⊕</span> 2NC
15	<b>FL 1501</b> 2NO	<b>FL 1502</b> 2NO	<b>FL 1504</b> 2NO	<b>FL 1505</b> 2NO
18	<b>FL 1801</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 1802</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 1804</b> 1NO+1NC	<b>FL 1805</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC
20	<b>FL 2001</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+2NC	<b>FL 2002</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+2NC	<b>FL 2004</b> 1NO+2NC	<b>FL 2005</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+2NC
21	<b>FL 2101</b> <span style="background-color: #d9ead3;">⊕</span> 3NC	<b>FL 2102</b> <span style="background-color: #d9ead3;">⊕</span> 3NC	<b>FL 2104</b> 3NC	<b>FL 2105</b> <span style="background-color: #d9ead3;">⊕</span> 3NC
22	<b>FL 2201</b> <span style="background-color: #d9ead3;">⊕</span> 2NO+1NC	<b>FL 2202</b> <span style="background-color: #d9ead3;">⊕</span> 2NO+1NC	<b>FL 2204</b> 2NO+1NC	<b>FL 2205</b> <span style="background-color: #d9ead3;">⊕</span> 2NO+1NC
2	<b>FL 201</b> 2x(1NO-1NC)	<b>FL 202</b> 2x(1NO-1NC)	<b>FL 204</b> 2x(1NO-1NC)	<b>FL 205</b> 2x(1NO-1NC)
E1	<b>FL E101</b> 1NO-1NC	<b>FL E102</b> 1NO-1NC	<b>FL E104</b> 1NO-1NC	<b>FL E105</b> 1NO-1NC
Max speed	page 6/3 - type 4	page 6/3 - type 3	0,5 m/s	page 6/3 - type 3
Min. force	8 N (25 N <span style="background-color: #d9ead3;">⊕</span> )	6 N (25 N <span style="background-color: #d9ead3;">⊕</span> )	0,17 Nm	6 N (25 N <span style="background-color: #d9ead3;">⊕</span> )
Travel diagrams	page 6/4 - group 1	page 6/4 - group 2	page 6/4 - group 1	page 6/4 - group 2

	With external rubber gasket	With external rubber gasket	With external rubber gasket	With external rubber gasket
5	<b>FL 508</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 510</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 511</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 515</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC
6	<b>FL 608</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 610</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 611</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 615</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC
7	<b>FL 708</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 710</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 711</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 715</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC
9	<b>FL 908</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 910</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 911</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 915</b> <span style="background-color: #d9ead3;">⊕</span> 2NC
10	<b>FL 1008</b> 2NO	<b>FL 1010</b> 2NO	<b>FL 1011</b> 2NO	<b>FL 1015</b> 2NO
11	<b>FL 1108</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1110</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1111</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1115</b> <span style="background-color: #d9ead3;">⊕</span> 2NC
12	<b>FL 1208</b> 2NO	<b>FL 1210</b> 2NO	<b>FL 1211</b> 2NO	<b>FL 1215</b> 2NO
13	<b>FL 1308</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1310</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1311</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1315</b> <span style="background-color: #d9ead3;">⊕</span> 2NC
14	<b>FL 1408</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1410</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1411</b> <span style="background-color: #d9ead3;">⊕</span> 2NC	<b>FL 1415</b> <span style="background-color: #d9ead3;">⊕</span> 2NC
15	<b>FL 1508</b> 2NO	<b>FL 1510</b> 2NO	<b>FL 1511</b> 2NO	<b>FL 1515</b> 2NO
18	<b>FL 1808</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 1810</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 1811</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC	<b>FL 1815</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+1NC
20	<b>FL 2008</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+2NC	<b>FL 2010</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+2NC	<b>FL 2011</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+2NC	<b>FL 2015</b> <span style="background-color: #d9ead3;">⊕</span> 1NO+2NC
21	<b>FL 2108</b> <span style="background-color: #d9ead3;">⊕</span> 3NC	<b>FL 2110</b> <span style="background-color: #d9ead3;">⊕</span> 3NC	<b>FL 2111</b> <span style="background-color: #d9ead3;">⊕</span> 3NC	<b>FL 2115</b> <span style="background-color: #d9ead3;">⊕</span> 3NC
22	<b>FL 2208</b> <span style="background-color: #d9ead3;">⊕</span> 2NO+1NC	<b>FL 2210</b> <span style="background-color: #d9ead3;">⊕</span> 2NO+1NC	<b>FL 2211</b> <span style="background-color: #d9ead3;">⊕</span> 2NO+1NC	<b>FL 2215</b> <span style="background-color: #d9ead3;">⊕</span> 2NO+1NC
2	<b>FL 208</b> 2x(1NO-1NC)	<b>FL 210</b> 2x(1NO-1NC)	<b>FL 211</b> 2x(1NO-1NC)	<b>FL 215</b> 2x(1NO-1NC)
E1	<b>FL E108</b> 1NO-1NC	<b>FL E110</b> 1NO-1NC	<b>FL E111</b> 1NO-1NC	<b>FL E115</b> 1NO-1NC
Max speed	page 6/3 - type 4	page 6/3 - type 4	page 6/3 - type 4	page 6/3 - type 2
Min. force	8 N (25 N <span style="background-color: #d9ead3;">⊕</span> )	11 N (25 N <span style="background-color: #d9ead3;">⊕</span> )	8 N (25 N <span style="background-color: #d9ead3;">⊕</span> )	11 N (25 N <span style="background-color: #d9ead3;">⊕</span> )
Travel diagrams	page 6/4 - group 1	page 6/4 - group 1	page 6/4 - group 1	page 6/4 - group 1

Accessories See page 5/1


Items with code on the green background are available in stock

All measures in the drawings are in mm


Contacts type:

- R** = snap action
- L** = slow action
- LO** = slow action overlapped
- LS** = slow action shifted
- LV** = slow action shifted and spaced
- LI** = slow action independent
- LA** = slow action closer
- ⚡** = electronic PNP



Contact blocks





Ø 8 mm stainless steel sphere




Ø 12,7 mm stainless steel sphere




5	<b>R</b>	FL 516	➔ 1NO+1NC	FL 518	➔ 1NO+1NC	FL 519	➔ 1NO+1NC	FL 520	1NO+1NC
6	<b>L</b>	FL 616	➔ 1NO+1NC	FL 618	➔ 1NO+1NC	FL 619	➔ 1NO+1NC		
7	<b>LO</b>	FL 716	➔ 1NO+1NC	FL 718	➔ 1NO+1NC	FL 719	➔ 1NO+1NC		
9	<b>L</b>	FL 916	➔ 2NC	FL 918	➔ 2NC	FL 919	➔ 2NC		
10	<b>L</b>	FL 1016	2NO	FL 1018	2NO	FL 1019	2NO	FL 1020	2NO
11	<b>R</b>	FL 1116	➔ 2NC	FL 1118	➔ 2NC	FL 1119	➔ 2NC		
12	<b>R</b>	FL 1216	2NO	FL 1218	2NO	FL 1219	2NO	FL 1220	2NO
13	<b>LV</b>	FL 1316	➔ 2NC	FL 1318	➔ 2NC	FL 1319	➔ 2NC		
14	<b>LS</b>	FL 1416	➔ 2NC	FL 1418	➔ 2NC	FL 1419	➔ 2NC		
15	<b>LS</b>	FL 1516	2NO	FL 1518	2NO	FL 1519	2NO		
18	<b>LA</b>	FL 1816	➔ 1NO+1NC	FL 1818	➔ 1NO+1NC	FL 1819	➔ 1NO+1NC	FL 1820	1NO+1NC
20	<b>L</b>	FL 2016	➔ 1NO+2NC	FL 2018	➔ 1NO+2NC	FL 2019	➔ 1NO+2NC	FL 2020	1NO+2NC
21	<b>L</b>	FL 2116	➔ 3NC	FL 2118	➔ 3NC	FL 2119	➔ 3NC	FL 2120	3NC
22	<b>L</b>	FL 2216	➔ 2NO+1NC	FL 2218	➔ 2NO+1NC	FL 2219	➔ 2NO+1NC	FL 2220	2NO+1NC
2	<b>R</b>	FL 216	2x(1NO-1NC)	FL 218	2x(1NO-1NC)	FL 219	2x(1NO-1NC)	FL 220	2x(1NO-1NC)
E1	<b>⚡</b>	FL E116	1NO-1NC	FL E118	1NO-1NC	FL E119	1NO-1NC	FL E120	1NO-1NC
Max speed		page 6/3 - type 2		page 6/3 - type 4		page 6/3 - type 4		1 m/s	
Min. force		8 N (25 N ➔)		8 N (25 N ➔)		8 N (25 N ➔)		0,09 Nm	
Travel diagrams		page 6/4 - group 1		page 6/4 - group 1		page 6/4 - group 1		page 6/4 - group 3	



Other rollers available. See page 2/32



Ø 3 mm stainless steel round rod



Contact blocks

5	<b>R</b>	FL 521	1NO+1NC	FL 525	1NO+1NC	FL 531	➔ 1NO+1NC	FL 532	1NO+1NC
6	<b>L</b>					FL 631	➔ 1NO+1NC	FL 632	1NO+1NC
7	<b>LO</b>					FL 731	➔ 1NO+1NC	FL 732	1NO+1NC
9	<b>L</b>					FL 931	➔ 2NC	FL 932	2NC
10	<b>L</b>	FL 1021	2NO	FL 1025	2NO	FL 1031	2NO	FL 1032	2NO
11	<b>R</b>					FL 1131	➔ 2NC	FL 1132	2NC
12	<b>R</b>	FL 1221	2NO	FL 1225	2NO	FL 1231	2NO	FL 1232	2NO
13	<b>LV</b>					FL 1331	➔ 2NC	FL 1332	2NC
14	<b>LS</b>					FL 1431	➔ 2NC	FL 1432	2NC
15	<b>LS</b>					FL 1531	2NO	FL 1532	2NO
16	<b>LI</b>					FL 1631	➔ 2NC	FL 1632	2NC
18	<b>LA</b>	FL 1821	1NO+1NC	FL 1825	1NO+1NC	FL 1831	➔ 1NO+1NC	FL 1832	1NO+1NC
20	<b>L</b>	FL 2021	1NO+2NC	FL 2025	1NO+2NC	FL 2031	➔ 1NO+2NC	FL 2032	1NO+2NC
21	<b>L</b>	FL 2121	3NC	FL 2125	3NC	FL 2131	➔ 3NC	FL 2132	3NC
22	<b>L</b>	FL 2221	2NO+1NC	FL 2225	2NO+1NC	FL 2231	➔ 2NO+1NC	FL 2232	2NO+1NC
2	<b>R</b>	FL 221	2x(1NO-1NC)	FL 225	2x(1NO-1NC)	FL 231	2x(1NO-1NC)	FL 232	2x(1NO-1NC)
E1	<b>⚡</b>	FL E121	1NO-1NC	FL E125	1NO-1NC	FL E131	1NO-1NC	FL E132	1NO-1NC
Max speed		1 m/s		1 m/s		page 6/3 - type 1		1,5 m/s	
Min. force		0,08 Nm		0,14 Nm		0,1 Nm (0,25 Nm ➔)		0,1 Nm	
Travel diagrams		page 6/4 - group 3		page 6/4 - group 3		page 6/4 - group 4		page 6/4 - group 4	

Accessories See page 5/1

Items with code on the green background are available in stock

Contacts type:

- R** = snap action
- L** = slow action
- LO** = slow action overlapped
- LS** = slow action shifted
- LV** = slow action shifted and spaced
- LI** = slow action independent
- LA** = slow action closer
- ⏏** = electronic PNP

Contact blocks

	3x3 mm square rod		Other rollers available. See page 2/32		Glass fibre rod			
5	<b>R</b> FL 533	1NO+1NC	FL 534	1NO+1NC	FL 535	⊕ <sup>(1)</sup> 1NO+1NC	FL 536	1NO+1NC
6	<b>L</b> FL 633	1NO+1NC	FL 634	1NO+1NC	FL 635	⊕ <sup>(1)</sup> 1NO+1NC	FL 636	1NO+1NC
7	<b>LO</b> FL 733	1NO+1NC	FL 734	1NO+1NC	FL 735	⊕ <sup>(1)</sup> 1NO+1NC	FL 736	1NO+1NC
9	<b>L</b> FL 933	2NC	FL 934	2NC	FL 935	⊕ <sup>(1)</sup> 2NC	FL 936	2NC
10	<b>L</b> FL 1033	2NO	FL 1034	2NO	FL 1035	2NO	FL 1036	2NO
11	<b>R</b> FL 1133	2NC	FL 1134	2NC	FL 1135	⊕ <sup>(1)</sup> 2NC	FL 1136	2NC
12	<b>R</b> FL 1233	2NO	FL 1234	2NO	FL 1235	2NO	FL 1236	2NO
13	<b>LV</b> FL 1333	2NC	FL 1334	2NC	FL 1335	⊕ <sup>(1)</sup> 2NC	FL 1336	2NC
14	<b>LS</b> FL 1433	2NC	FL 1434	2NC	FL 1435	⊕ <sup>(1)</sup> 2NC	FL 1436	2NC
15	<b>LS</b> FL 1533	2NO	FL 1534	2NO	FL 1535	2NO	FL 1536	2NO
16	<b>LI</b> FL 1633	2NC	FL 1634	2NC	FL 1635	⊕ <sup>(1)</sup> 2NC	FL 1636	2NC
18	<b>LA</b> FL 1833	1NO+1NC	FL 1834	1NO+1NC	FL 1835	⊕ <sup>(1)</sup> 1NO+1NC	FL 1836	1NO+1NC
20	<b>L</b> FL 2033	1NO+2NC	FL 2034	1NO+2NC	FL 2035	⊕ <sup>(1)</sup> 1NO+2NC	FL 2036	1NO+2NC
21	<b>L</b> FL 2133	3NC	FL 2134	3NC	FL 2135	⊕ <sup>(1)</sup> 3NC	FL 2136	3NC
22	<b>L</b> FL 2233	2NO+1NC	FL 2234	2NO+1NC	FL 2235	⊕ <sup>(1)</sup> 2NO+1NC	FL 2236	2NO+1NC
2	<b>R</b> FL 233	2x(1NO-1NC)	FL 234	2x(1NO-1NC)	FL 235	2x(1NO-1NC)	FL 236	2x(1NO-1NC)
E1	<b>⏏</b> FL E133	1NO-1NC	FL E134	1NO-1NC	FL E135	1NO-1NC	FL E136	1NO-1NC
Max speed	1,5 m/s		1 m/s		page 6/3 - type 1		1,5 m/s	
Min. force	0,1 Nm		0,1 Nm		0,1 Nm (0,25 Nm ⊕)		0,1 Nm	
Travel diagrams	page 6/4 - group 4		page 6/4 - group 4		page 6/4 - group 4		page 6/4 - group 4	

	Other rollers available. See page 2/32	Other rollers available. See page 2/32	Porcelain roller	Other rollers available. See page 2/32				
5	<b>R</b> FL 551	⊕ <sup>(1)</sup> 1NO+1NC	FL 552	⊕ <sup>(1)</sup> 1NO+1NC	FL 553-E11V9	⊕ <sup>(1)</sup> 1NO+1NC	FL 556	⊕ <sup>(1)</sup> 1NO+1NC
6	<b>L</b> FL 651	⊕ <sup>(1)</sup> 1NO+1NC	FL 652	⊕ <sup>(1)</sup> 1NO+1NC	FL 653-E11V9	⊕ <sup>(1)</sup> 1NO+1NC	FL 656	⊕ <sup>(1)</sup> 1NO+1NC
7	<b>LO</b> FL 751	⊕ <sup>(1)</sup> 1NO+1NC	FL 752	⊕ <sup>(1)</sup> 1NO+1NC	FL 753-E11V9	⊕ <sup>(1)</sup> 1NO+1NC	FL 756	⊕ <sup>(1)</sup> 1NO+1NC
9	<b>L</b> FL 951	⊕ <sup>(1)</sup> 2NC	FL 952	⊕ <sup>(1)</sup> 2NC	FL 953-E11V9	⊕ <sup>(1)</sup> 2NC	FL 956	⊕ <sup>(1)</sup> 2NC
10	<b>L</b> FL 1051	2NO	FL 1052	2NO	FL 1053-E11V9	2NO	FL 1056	2NO
11	<b>R</b> FL 1151	⊕ <sup>(1)</sup> 2NC	FL 1152	⊕ <sup>(1)</sup> 2NC	FL 1253-E11V9	2NO	FL 1156	⊕ <sup>(1)</sup> 2NC
12	<b>R</b> FL 1251	2NO	FL 1252	2NO	FL 1353-E11V9	⊕ <sup>(1)</sup> 2NC	FL 1256	2NO
13	<b>LV</b> FL 1351	⊕ <sup>(1)</sup> 2NC	FL 1352	⊕ <sup>(1)</sup> 2NC	FL 1453-E11V9	⊕ <sup>(1)</sup> 2NC	FL 1356	⊕ <sup>(1)</sup> 2NC
14	<b>LS</b> FL 1451	⊕ <sup>(1)</sup> 2NC	FL 1452	⊕ <sup>(1)</sup> 2NC	FL 1553-E11V9	2NO	FL 1456	⊕ <sup>(1)</sup> 2NC
15	<b>LS</b> FL 1551	2NO	FL 1552	2NO	FL 1553-E11V9	2NO	FL 1556	2NO
16	<b>LI</b> FL 1651	2NC	FL 1652	2NC	FL 1653-E11V9	⊕ <sup>(1)</sup> 2NC	FL 1656	⊕ <sup>(1)</sup> 2NC
18	<b>LA</b> FL 1851	⊕ <sup>(1)</sup> 1NO+1NC	FL 1852	⊕ <sup>(1)</sup> 1NO+1NC	FL 1853-E11V9	⊕ <sup>(1)</sup> 1NO+1NC	FL 1856	⊕ <sup>(1)</sup> 1NO+1NC
20	<b>L</b> FL 2051	⊕ <sup>(1)</sup> 1NO+2NC	FL 2052	⊕ <sup>(1)</sup> 1NO+2NC	FL 2053-E11V9	⊕ <sup>(1)</sup> 1NO+2NC	FL 2056	⊕ <sup>(1)</sup> 1NO+2NC
21	<b>L</b> FL 2151	⊕ <sup>(1)</sup> 3NC	FL 2152	⊕ <sup>(1)</sup> 3NC	FL 2153-E11V9	⊕ <sup>(1)</sup> 3NC	FL 2156	⊕ <sup>(1)</sup> 3NC
22	<b>L</b> FL 2251	⊕ <sup>(1)</sup> 2NO+1NC	FL 2252	⊕ <sup>(1)</sup> 2NO+1NC	FL 2253-E11V9	⊕ <sup>(1)</sup> 2NO+1NC	FL 2256	⊕ <sup>(1)</sup> 2NO+1NC
2	<b>R</b> FL 251	2x(1NO-1NC)	FL 252	2x(1NO-1NC)	FL 253-E11	2x(1NO-1NC)	FL 256	2x(1NO-1NC)
E1	<b>⏏</b> FL E151	1NO-1NC	FL E152	1NO-1NC	FL E153-E11V9	1NO-1NC	FL E156	1NO-1NC
Max speed	page 6/3 - type 1		page 6/3 - type 1		0,5 m/s		page 6/3 - type 1	
Min. force	0,06 Nm (0,25 Nm ⊕)		0,06 Nm (0,25 Nm ⊕)		0,03 Nm (0,25 Nm ⊕)		0,1 Nm (0,25 Nm ⊕)	
Travel diagrams	page 6/4 - group 4		page 6/4 - group 4		page 6/4 - group 5		page 6/4 - group 4	

Accessories See page 5/1

<sup>(1)</sup> Positive opening only with lever adjusted on the max. See page 2/31

Items with code on the green background are available in stock

Contacts type:

- R** = snap action
- L** = slow action
- LO** = slow action overlapped
- LS** = slow action shifted
- LV** = slow action shifted and spaced
- LI** = slow action independent
- LA** = slow action closer
- A** = electronic PNP

Contact blocks

	Other rollers available. See page 2/32	With stainless steel rollers on request	With stainless steel rollers on request	Rope switches for signalling
5 <b>R</b>	FL 557  1NO+1NC	FL 541  1NO+1NC	FL 542  1NO+1NC	FL 576 1NO+1NC
6 <b>L</b>	FL 657  1NO+1NC	Bistable switch with single track lyra lever	Bistable switch with double tracks lyra lever	FL 676 1NO+1NC
7 <b>LO</b>	FL 757  1NO+1NC			FL 776 1NO+1NC
9 <b>L</b>	FL 957  2NC	<p>S = mechanical snap point positive opening with 21-22 contact only</p>	<p>S = mechanical snap point positive opening with 21-22 contact only</p>	FL 976 2NO
10 <b>L</b>	FL 1057 2NO			FL 1076 2NC
11 <b>R</b>	FL 1157  2NC			FL 1176 2NO
12 <b>R</b>	FL 1257 2NO			FL 1276 2NC
13 <b>LV</b>	FL 1357  2NC			FL 1376 2NO
14 <b>LS</b>	FL 1457  2NC			FL 1476 2NO
15 <b>LS</b>	FL 1557 2NO			FL 1576 2NC
16 <b>LI</b>	FL 1657  2NC			FL 1876 1NO+1NC
18 <b>LA</b>	FL 1857  1NO+1NC			FL 2076 2NO+1NC
20 <b>L</b>	FL 2057  1NO+2NC			FL 2176 3NO
21 <b>L</b>	FL 2157  3NC	FL 2276 1NO+2NC		
22 <b>L</b>	FL 2257  2NO+1NC	FL 276 2x(1NO-1NC)		
2 <b>R</b>	FL 257 2x(1NO-1NC)			
E1 <b>A</b>	FL E157 1NO-1NC			
Max speed	page 6/3 - type 1	0,5 m/s with 30° cam	0,5 m/s with 30° cam	0,5 m/s
Min. force	0,1 Nm (0,25 Nm )	0,21 Nm	0,21 Nm	initial 20 N - final 40 N
Travel diagrams	page 6/4 - group 4			page 6/4 - group 6



## 2 Position switches FL series


### Position switches with revolving lever without actuator

Contacts type:



- R** = snap action
- L** = slow action
- LO** = slow action overlapped
- LS** = slow action shifted
- LV** = slow action shifted and spaced
- LI** = slow action independent
- LA** = slow action closer
- A** = electronic PNP

Contact blocks

Regular head



Compact head



#### IMPORTANT

**For safety applications:** join only switches and actuators marked with symbol

For more information about safety applications see page 6/1.

5	<b>R</b>	<b>FL 538</b>		1NO+1NC	<b>FL 558</b>		1NO+1NC	<b>FL 540</b> 1NO+1NC Bistable switch  S = mechanical snap point positive opening with 21-22 contact only	
6	<b>L</b>	<b>FL 638</b>		1NO+1NC	<b>FL 658</b>		1NO+1NC		
7	<b>LO</b>	<b>FL 738</b>		1NO+1NC	<b>FL 758</b>		1NO+1NC		
9	<b>L</b>	<b>FL 938</b>		2NC	<b>FL 958</b>		2NC		
10	<b>L</b>	<b>FL 1038</b>		2NO	<b>FL 1058</b>		2NO		
11	<b>R</b>	<b>FL 1138</b>		2NC	<b>FL 1158</b>		2NC		
12	<b>R</b>	<b>FL 1238</b>		2NO	<b>FL 1258</b>		2NO		
13	<b>LV</b>	<b>FL 1338</b>		2NC	<b>FL 1358</b>		2NC		
14	<b>LS</b>	<b>FL 1438</b>		2NC	<b>FL 1458</b>		2NC		
15	<b>LS</b>	<b>FL 1538</b>		2NO	<b>FL 1558</b>		2NO		
16	<b>LI</b>	<b>FL 1638</b>		2NC					
18	<b>LA</b>	<b>FL 1838</b>		1NO+1NC	<b>FL 1858</b>		1NO+1NC		
20	<b>L</b>	<b>FL 2038</b>		1NO+2NC	<b>FL 2058</b>		1NO+2NC		
21	<b>L</b>	<b>FL 2138</b>		3NC	<b>FL 2158</b>		3NC		
22	<b>L</b>	<b>FL 2238</b>		2NO+1NC	<b>FL 2258</b>		2NO+1NC		
2	<b>R</b>	<b>FL 238</b>		2x(1NO-1NC)	<b>FL 258</b>		2x(1NO-1NC)		
E1	<b>A</b>	<b>FL E138</b>		1NO-1NC	<b>FL E158</b>		1NO-1NC		
Min. force		0,1 Nm (0,25 Nm			0,06 Nm (0,25 Nm				0,5 m/s with 30° cam
Travel diagrams		page 6/4 - group 4			page 6/4 - group 4				0,21 Nm

### Loose actuators

10 pcs pack

**IMPORTANT:** These loose actuators can be used with items of series FD, FP, FL, FC only

Polymer roller Ø 20 mm	Adjustable round rod Ø 3x125 mm	Adjustable square rod 3x3x125 mm	Flexible rod actuator	Adjustable actuator with polymer roller	Adjustable glass fibre rod
<b>VF L31</b>	<b>VF L32</b> <sup>(3)</sup>	<b>VF L33</b> <sup>(3)</sup>	<b>VF L34</b>	<b>VF L35</b> <sup>(1) (3)</sup>	<b>VF L36</b> <sup>(3)</sup>
Polymer roller Ø 20 mm	Polymer roller Ø 20 mm	Porcelain roller	Adjustable safety actuator with polymer roller	Polymer roller Ø 20 mm	
<b>VF L51</b>	<b>VF L52</b>	<b>VF L53</b> <sup>(2)</sup>	<b>VF L56</b> <sup>(3)</sup>	<b>VF L57</b>	


Only orders for multiple quantities of the packs are accepted.

<sup>(1)</sup> Actuator VF L35 suits for safety applications only if adjusted to its max length, as you can see in figure beside. If you need an adjustable lever for safety applications, use the adjustable safety lever VF L56.

<sup>(2)</sup> The position switch obtained by assembling the switch FL •58 (e.g. FL 558, FL 658) with the actuator VF L53 will not present the same travel diagrams and actuating forces as the position switch FL •53-E11V9 (e.g. FL 553-E11V9, FL 653-E11V9...).

<sup>(3)</sup> If it is installed with switch FL •58 (e.g. FL 558, FL 658...), the actuator can mechanically interfere with the housing of the switch. The interference could happen or not according to the actuator and the head fixing position.

<sup>(4)</sup> The actuator cannot be oriented to inside direction because it will mechanically interfere with the switch head.



**Accessories** See page 5/1

Items with code on the **green** background are available in stock

**Special loose actuators**

10 pcs pack

**IMPORTANT:** These loose actuators can be used with items of series FD, FP, FL, FC only

Ø 20 mm stainless steel rollers

VF L31-1 (1)	VF L35-1 (1) (3)	VF L51-1 (1)	VF L52-1 (1)	VF L56-1 (3)	VF L57-1 (1)

Ø 35 mm polymer rollers

VF L31-2 (4)	VF L35-2 (1) (3)	VF L51-2 (4)	VF L52-2 (1)	VF L56-2 (3)	VF L57-2 (1)

Ø 40 mm rubber rollers

VF L31-R5 (4)	VF L35-R5 (1) (3)	VF L51-R5 (4)	VF L52-R5 (1)	VF L56-R5 (3)	VF L57-R5 (4)

Ø 50 mm rubber rollers

VF L31-3 (4)	VF L35-3 (1) (3)	VF L51-3 (4)	VF L52-3 (4)	VF L56-3 (3)	VF L57-3 (4)

Ø 50 mm overhanging rubber rollers

VF L35-4 (1) (3)	VF L56-4 (3)